
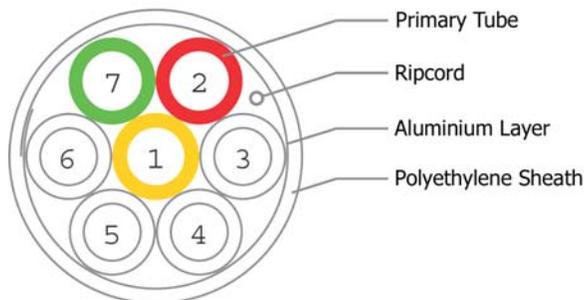


# Sirocco Tubes (External) - Direct Install Assembly

Prysmian Part Numbers: See Table Below

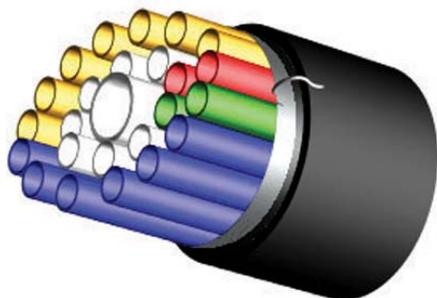

Profile of a 7 way assembly

**Empty small diameter HDPE low friction tubes for blown fibre installation in last-mile and campus applications.**

- Rapid dedicated customer connect using proven mechanical protection of HDPE.
- Low friction internal coating for maximum fibre blowing distance.
- 5 mm O/D, each tube accommodates up to a 12 fibre unit.
- Recommended for use in ducts and sub-ducts.
- Aluminium tape layer acts as moisture barrier.
- Can be customised to suit user requirements (e.g. tube style, sheath colour, print legend).
- Supplied on wooden drums, containing either one length of tube or multiple lengths for simultaneous installation.
- External versions available in different constructions – direct install, direct bury, steel armour, anti-termite, anti-rodent.

**Assembly of tubes surrounded by an aluminium moisture barrier and an outer polyethylene sheath.**

| Assembly type | Product Code | Nominal O.D. (mm) | Min. Bend Radius (mm) | Max. Tensile (N) | Nominal Weight (g/m) | Crush Rating (KN) | Drum Lengths (m) |         |
|---------------|--------------|-------------------|-----------------------|------------------|----------------------|-------------------|------------------|---------|
| 1 Way         | OMA0501      | 9.4               | 12 x D                | 1W               | 49                   | 1                 | 500m D*          | 2000m R |
|               |              |                   |                       |                  |                      |                   | 1000m R*         | 4000m R |
| 2 Way         | OMA0502      | 8.8 x 13.8        | 12 x D                | 1W               | 78                   | 1                 | 500m D           | 2000m R |
|               |              |                   |                       |                  |                      |                   | 1000m R          | 4000m R |
| 4 Way         | OMA0504      | 16.5              | 12 x D                | 1W               | 116                  | 1                 | 500m D           | 2000m R |
|               |              |                   |                       |                  |                      |                   | 1000m R          | 4000m R |
| 7 Way         | OMA0507      | 19.4              | 12 x D                | 1W               | 159                  | 1                 | 500m D           | 2000m R |
|               |              |                   |                       |                  |                      |                   | 1000m R          | 4000m R |
| 12 Way        | OMA0512      | 24.8              | 12 x D                | 1W               | 234                  | 1                 | 1000m R          | 3000m R |
|               |              |                   |                       |                  |                      |                   | 2000m R          |         |
| 19 Way        | OMA0519      | 28.8              | 12 x D                | 1W               | 323                  | 1                 | 1000m R          | 3000m R |
|               |              |                   |                       |                  |                      |                   | 2000m R          |         |
| 24 Way        | OMA0524      | 34.4              | 12 x D                | 1W               | 422                  | 1                 | 1000m R          |         |
|               |              |                   |                       |                  |                      |                   | 2000m R          |         |

\*D = Disposable Drum \*R = Returnable Drum

Prysmian Telecom Cables & Systems UK Ltd, Chickenhall Lane, Bishopstoke, Hants SO50 6YU, UK

Technical Enquiries +44 (0) 2380 608760 Fax Number +44 (0) 2380 608769

© PRYSMIAN 2006. All Rights Reserved.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian. The information is believed correct at the time of issue. Prysmian reserves the right to amend this specification without notice. This specification is not contractually valid unless specifically authorised by Prysmian.

Issue 01, July 2006  
Ref: ST004-01