

Draka Co

sales@dra

www.drak

Phosphor Bronze with min, 50 micro-inch Tin
plated

Wire size compatibility

23-26 AWG solid wire

Dimensions

482 x 44 x 29

Performance

IDC cap colour code supports both wiring schemes TIA 568A & 568B

Insertion force

900 gm for 8 contacts

Retention strength



Draka UC^{Connect}300


1U 24port Cat6 UTP 180° Punch down Panel

Datacom Connectivity

1U 24port Cat6 UTP 180° Punch down Panel

Issue date: 10-08-26

Supersedes: 02/10

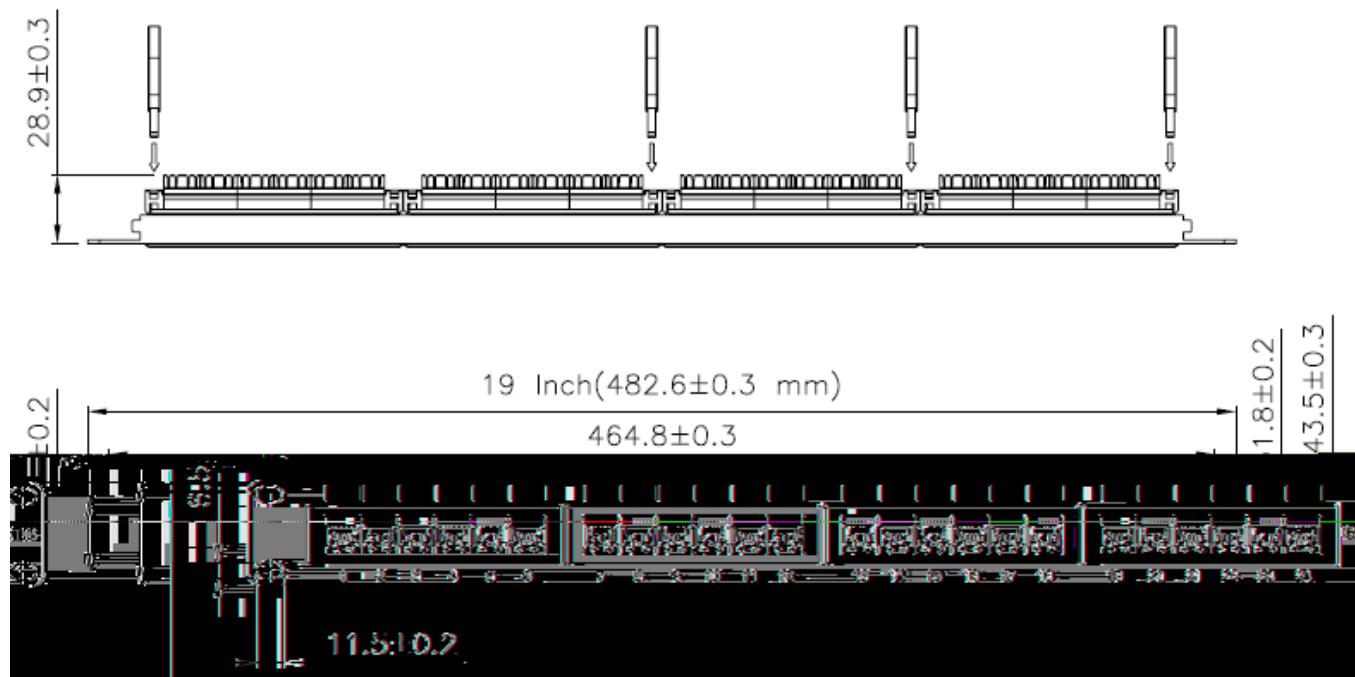

Technical data

Material code	Designation	Size	Weight	Items per packaging unit
1021290	1U 24port Cat6UTP 180°Punch down Panel	482 x 44 x 29	545 g	1 or 20

Related Products

Material code	Designation	Weight	Items per packaging unit
1021314	Support Bar for 180°Patch Panel	267 g	1 or 20

Draka Communications

sales@drakaconnectivity.co.uk
www.drakaconnectivity.co.uk

The Draka Communications policy of continuous improvement
may cause in changed specifications without prior notice