

Draka UC^{Connect}400

1U 24port Cat6 FTP 90°Punch down Panel with Rear Man agement



Datacom Connectivity

1U 24port Cat6 FTP 90°Punch down Panel with Rear Mana gement

Issue date: 10-10-29 Supersedes: -



Value Innovation is a way of looking at the world. By combining market insight with technological know-how and building strong, long-lasting relationships, we add value to your business with advanced communication solutions and services that are designed to last. No matter how complex your challenge, we have a product or solution that will do more than meet your needs. New applications, breakthrough cables or complete network designs - it's all part of what we call Value Innovation, and it's what drives us.



Cat6 Shielded 24-Port Patch Panel

- Cat6 compliant performance
- 90° termination blocks for easy termination
- Compatible with 110 & Krone Punch Tools
- Built in cable management
- Available in Black and Gray
- Lasermark label available on request

Specification						
Item	Description					
RJ45 Plastic housing	ABS + PC					
RJ45 jack contact material and finish	Phosphor Bronze					
	Contact area : Min 3 mm 50 micro-inch Gold plated over Nickel colour					
IDC terminal and finish	Phosphor Bronze with min, 50 micro-inch Tin plated					
Wire size compatibility	23-26 AWG solid wire					
Dimensions	482 x 44 x 109					
Performance						
IDC cap colour code supports both wiring scheme	C cap colour code supports both wiring schemes TIA 568A & 568B					
Insertion force	900 gm for 8 contacts					
Retention strength	7.7kg between jack and plug					
Operating temperature	-10℃ to 60℃					
Durability	Jack 750 cycles					



Draka UC^{Connect}400

1U 24port Cat6 FTP 90° Punch down Panel with Rear Mana gement


Datacom Connectivity

1U 24port Cat6 FTP 90° Punch down Panel with Rear Mana gement

Supersedes: -

11.5±0.2

Issue date: 10-10-29

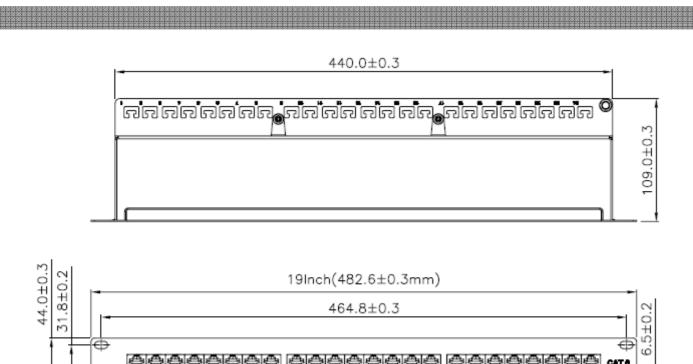

Technical data							
Material code	SAP Description	Designation	Size	Weight	Items per packaging unit		
1021292	UC C400 PP TR S BK 24 1U	1U 24port Cat6 FTP Panel	482 x 44 x 109	1520 g	1 or 20 g		
Related Produc							
Material code	SAP Description	Designation	Size	Weight	Items per packaging unit		