
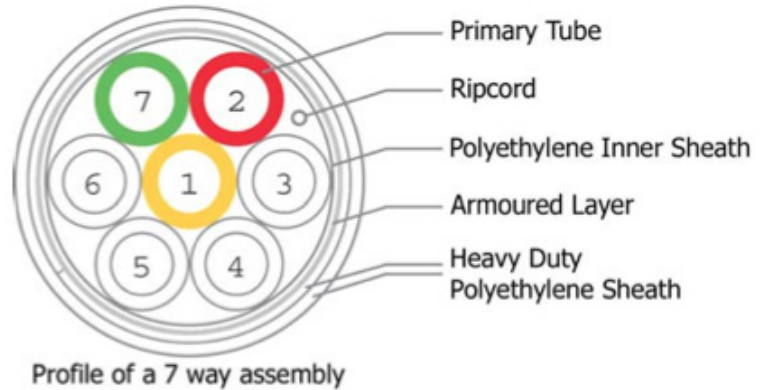


## Sirocco Tubes (External) - Direct Bury Armoured Assembly

Part Number: See following page

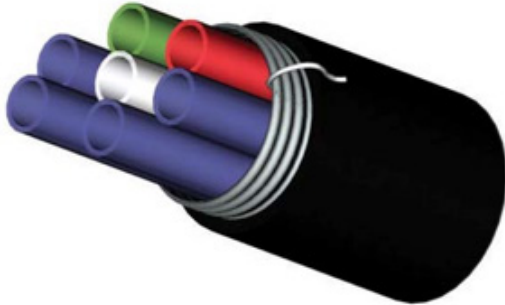

### Product description

**Empty small diameter HDPE low friction tubes for blown fibre installation in last-mile, industrial and campus applications.**

- Rapid dedicated customer connect using proven mechanical protection of HDPE.
- Low friction internal coating for maximum fibre blowing distance.
- 5 mm O/D, each tube accommodates up to a 12 fibre unit.
- Recommended for more onerous direct burial applications where corrugated armour layer provides maximum protection.
- Can be customised to suit user requirements (e.g. tube style, sheath colour, print legend).
- Supplied on wooden drums containing either one length of tube or multiple lengths for simultaneous installation.
- External versions available in different constructions – direct install, direct bury, steel armour, anti-termite, anti-rodent.

**Assembly of tubes surrounded by an aluminium moisture barrier and an outer polyethylene sheath.**

Available in 1, 2, 4, 7, 12, 19 and 24 way (3mm O/D available on request)

Assembly type	Product Code	Nominal O.D. (mm)	Steel Armour	Ripcord Qty	Min. bend radius (mm)	Max. tensile (N)	Nominal weight (g/m)	Drum Lengths (m)	
1 Way	OMAR0501	11.9	Yes	1	353	1740	123	500m D* 1000m R*	2000m R 4000m R
2 Way	OMAR0502	11.9 x 16.9	Yes	1	353	2640	148	500m D 1000m R	2000m R 4000m R
4 Way	OMAR0504	18.9	Yes	1	536	3300	247	500m D 1000m R	2000m R 4000m R
7 Way	OMAR0507	21.9	Yes	1	630	4800	316	500m D 1000m R	2000m R 4000m R
12 Way	OMAR0512	27.1	Yes	2	756	5400	435	1000m R 2000m R	3000m R
19 Way	OMAR0519	31.9	Yes	2	920	6600	566	1000m R 2000m R	3000m R
24 Way	OMAR0524	36.5	Yes	2	1071	7200	701	1000m R 2000m R	3000m R

D\* Disposable Drum      R\* Returnable Drum

© PRYSMIAN GROUP 2012, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alternation afterwards of product may give different results. The information claimed within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. This information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.

## Sirocco Tubes (External) - Direct Install Assembly

Part Number: See following page

### Multi-Tube Direct Install Assembly

**Assembly of tubes surrounded by an aluminium moisture barrier and an outer polyethylene sheath.**

Available in 1, 2, 4, 7, 12, 19 and 24 way (3mm O/D available on request)

Assembly type	Product Code	Nominal O.D. (mm)	Min. bend radius (mm)	Max. tensile (N)	Nominal weight (g/m)	Crush rating (KN)	Drum Lengths (m)	
1 Way	OMA0501	7.8 - 9.4	12 x D	1W	49	1	500m D* 1000m R*	2000m R 4000m R
2 Way	OMA0502	7.8 - 8.8 x 12.8 - 13.8	12 x D	1W	78	1	500m D 1000m R	2000m R 4000m R
4 Way	OMA0504	14.8 - 16.5	12 x D	1W	116	1	500m D 1000m R	2000m R 4000m R
7 Way	OMA0507	17.8 - 19.4	12 x D	1W	159	1	500m D 1000m R	2000m R 4000m R
12 Way	OMA0512	23.0 - 24.8	12 x D	1W	234	1	1000m R 2000m R	3000m R
19 Way	OMA0519	27.8 - 28.8	12 x D	1W	323	1	1000m R 2000m R	3000m R
24 Way	OMA0524	32.3 - 34.4	12 x D	1W	422	1	1000m R 2000m R	

D\* Disposable Drum      R\* Returnable Drum

#### Tensile

Tested in accordance with IEC 60794-1-2 Method E1. There shall be no permanent deformation of the primary or assembly parts after an applied load of 1.0 (spec. weight kg/km) N at 20mm / minute.

#### Crush Performance

Tested in accordance with IEC 60794-1-2 Method E3. After a maintained load of 1KN for 1 minute there shall be no deformation of primary tubes greater than 0.5 mm

#### Stress Crack Resistance

Tested in accordance with BS6496 Section 99.1 with chemical Caf on CF30.