




8723 EQ. 2pair Individual Foil Screened

Key Features

- High Frequency Low Loss
- Individually Foiled Screen
- LSF or P.E. Sheath




Coaxial and Specialist Cable

Part No: See Below

General Description:

8723 Belden Equivalent cable consists of a 22AWG two pair with 7 strands of 0.25mm tinned copper wire. Sheathed overall in either LSF or PE and with a rated voltage of 300v.

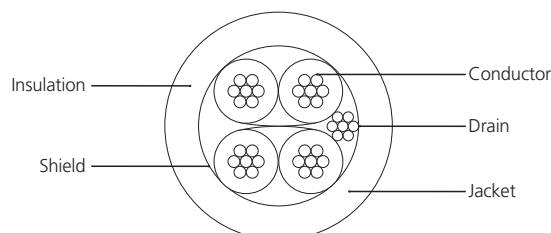

Relevant Test Standards:

UL1581 CPR Classification: Eca (LSF Sheath Only) CPR Classification: Fca (PE Sheath Only)

Part Numbers

TRI-000087	8723 Equivalent Two Pair Individual Foil Screened 22AWG LSF Grey - 100m
TRI-000126	8723 Equivalent Two Pair Individual Foil Screened 22AWG LSF Grey - Bulk
TRI-000857	8723 Equivalent Two Pair Individual Foil Screened 22AWG LSF White – 100m
TRI-002429	8723 Equivalent Two Pair Individual Foil Screened 22AWG PE Black – 100m
TRI-000463	8723 Equivalent Two Pair Individual Foil Screened 22AWG PE Black – Bulk

Cable Construction:

Material Breakdown:

Conductor	Stranded Tinned Copper	
	Nom. O.D. (mm)	7*0.24 up +0.008 down -0.008
Insulation	SPE	Diameter: 1.22+0.13mm *2*2
	Jacket	External O.D. 5.90mm(+/-0.20mm)
	Surface	Clean / Smooth
	Outer Material	SPE (complies RoHS)
	Colour	Black
Shield	AL-foil	Colour: Blue
	Tubing Colours	White, Green, Red, Black
Drain	Material:	Stranded Tinned Copper
	Nom O.D. (mm):	0.19*7 up/down (+0.008)

Electrical Characteristics:

Conductor Resistance	20°C, Conductor DC Resistance	< 6.53 Ω/100M
Insulation DC Resistance	20°C, Insulation DC Resistance	>200Ω.M
Rated Voltage		300v
Rated Temperature (°C)		-20°C to +80°C