



CW1308 2-6 Pair Internal LSF Voice Cable


Key Features

- General Signal Cable
- LSF Sheath
- Manufactured to British Telecom CW1308 standards.

Voice Cable

General Description:

Our CW1308 cable is manufactured to BT CW1308 specification. This cable is designed to handle low frequency signals and is intended for use with telephone and other communication equipment.

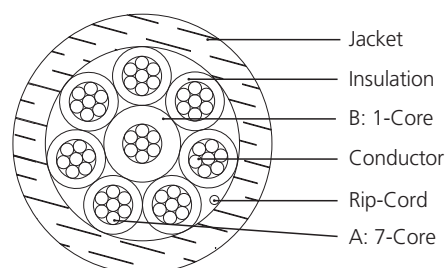

Part Numbers (Please state 100mtr or 200mtr drums when ordering)

TRI-001289	2 Pair CW1308 LSF Internal Voice Cable - 100m 200m
TRI-000947	3 Pair CW1308 LSF Internal Voice Cable - 100m 200m
TRI-001292	4 Pair CW1308 LSF Internal Voice Cable - 100m 200m
TRI-001294	6 Pair CW1308 LSF Internal Voice Cable - 100m 200m

Cable Construction:		2 Pair	3 Pair	4 Pair	6 Pair
Conductor	Material	Solid Bare Copper			
	Nom. O.D. (mm)	0.4 + 0.008	0.5 + 0.010	0.5 + 0.010	0.5 + 0.010
Insulation	Material	PVC			
	Diameter	0.90 (+0.10mm) 2*2	0.90 (+0.10mm) 2*3	0.90 (+0.10mm) 2*4	0.90 (+0.10mm) 2*6
Jacket	External O.D.	3.50mm(+0.18mm)	4.00mm(+0.18mm)	4.60mm(+0.20mm)	5.70mm(+0.20mm)
	Surface	Clean / Smooth			
	Outer Material	LSF (complies RoHS)			
	Colour	White			
Inner	White/Orange	White/Orange	White/Orange	White/Orange	White/Orange
Sheath	Orange/White	Orange/White	Orange/White	Orange/White	Orange/White
Colours	White/Blue	White/Blue	White/Blue	White/Blue	White/Blue
	Blue/White	Blue/White	Blue/White	Blue/White	Blue/White
		White/Green	White/Green	White/Green	White/Green
		Green/White	Green/White	Green/White	Green/White
			White/Brown	White/Brown	White/Brown
			Brown/White	Brown/White	Green/White
					Red/Blue
					Blue/Red
					White/Brown
					Brown/White


Electrical Characteristics:

	2 Pair	3 Pair	4 Pair	6 Pair
Conductor DC Resistance 20°C	<10.54 Ω/100M	<10.54 Ω/100M	<10.54 Ω/100M	<10.54 Ω/100M
Min. Insulation DC Resistance 20°C	>200 MΩ*M	>200 MΩ*M	>200 MΩ*M	>200 MΩ*M
Rated Voltage	300v	300v	300v	300v
Rated Temperature (°C)	80°C	80°C	80°C	80°C