



6-Core Unscreened Alarm LSF

Key Features


- Low Voltage
- LSF Sheath

Coaxial and Specialist Cable

Part No: See Below

General Description:

This 6-core cable is a general-purpose Signal and Alarm cable. The cable is ideal for use in alarm installations or where low voltages are used.

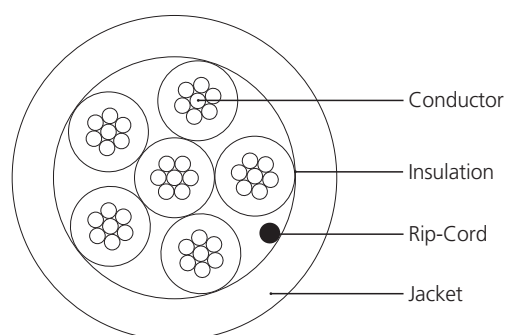

Relevant Test Standards:

UL1581

Part Numbers

TRI-000095	6 Core Unscreened LSF Alarm White - 100m Type 1
TRI-000100	6 Core Unscreened LSF Alarm White - 100m Type 2
TRI-001195	6 Core Unscreened LSF Alarm White - 100m Type 3

Cable Construction:

Material Breakdown:

Conductor	Material	Stranded Copper Clad Aluminum
	Nom. O.D. (mm)	0.19*7 up +0.001 down -0.008
Insulation	Material	PVC
	Diameter	1.00+0.10mm*6
Jacket	External O.D.	4.00mm(+/-0.18mm)
	Surface	Clean / Smooth
	Outer Material	LSF (complies RoHS)
	Colour	White
Rip-Cord	Material	Nylon
	Colour	Yellow
Inner Sheath Colours	Black. Red. White. Green. Blue. Yellow	

Electrical Characteristics:

Conductor Resistance	20°C, Conductor DC Resistance	< 15.53 Ω/100M
Min. Insulation DC Resistance	20°C, Insulation DC Resistance	>500Ω.M
Rated Voltage		300v
Rated Temperature (°C)		80°C