



9504 EQ. 4 Pair Foil Screened 24AWG LSF

Key Features

- High Frequency Low Loss
- Individually Foiled Screen
- LSF Sheath




Coaxial and Specialist Cable

Part No: See Below

General Description:

9504 Belden Equivalent cable consists of a 24AWG foil screened four pair with 7 strands of 0.25mm tinned copper wire. Sheathed overall in LSF and with a rated voltage of 300v.

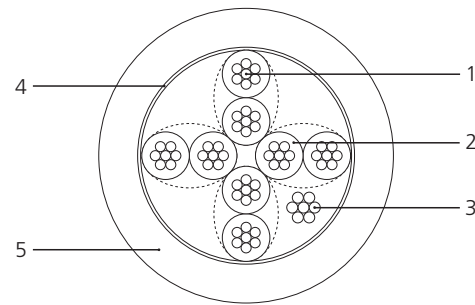

Relevant Test Standards:

UL1581

Part Numbers

TRI-000140-100	9504 Equivalent Four Pair Foil Screened 24AWG LSF - 100m
TRI-000140-250	9504 Equivalent Four Pair Foil Screened 24AWG LSF - 200m
TRI-000140-500	9504 Equivalent Four Pair Foil Screened 24AWG LSF - 500m

Cable Construction:

Material Breakdown:

Conductor (1)	Stranded Tinned Copper	
	Nom. O.D. (mm)	7*0.20 up +0.008 down -0.008
Insulation (2)	FR-PVC	Diameter: 1.05 +0.13mm *2*4
Jacket (5)	External O.D.	5.30mm(+/-0.20mm)
	Surface	Clean / Smooth
	Outer Material	LSF (complies RoHS)
	Colour	Grey
Shield (4)	Material: AL-foil	Colour: Blue
Drain (3)	Material:	Stranded Tinned Copper
	Nom O.D. (mm):	0.20*7 up/down (+0.008)

Electrical Characteristics:

Conductor Resistance	20°C, Conductor DC Resistance	< 9.41 Ω/100M
Insulation DC Resistance	20°C, Insulation DC Resistance	>200Ω.M
Rated Voltage		300v
Rated Temperature (°C)		+80°C