



9538 EQ. 8 Core Foil Screened 24AWG LSF Grey

Key Features

- High Frequency Low Loss
- Individually Foiled Screen
- LSF Sheath




Coaxial and Specialist Cable

Part No: See Below

General Description:

9538 Belden Equivalent cable consists of a 24AWG foil screened eight-core with 7 strands of 0.20mm tinned copper wire. Sheathed overall in LSF and with a rated voltage of 300v

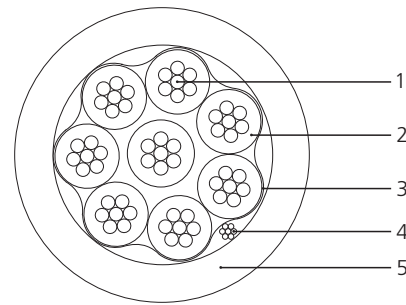

Relevant Test Standards:

UL1581

Part Numbers

TRI-000145-100	9538 Equivalent Eight Core Foil Screened 24AWG LSF Grey - 100m
TRI-000145-500	9538 Equivalent Eight Core Foil Screened 24AWG LSF Grey - 500m

Cable Construction:

Material Breakdown:

Conductor (1)	Stranded Tinned Copper	
Nom. O.D. (mm)	7*0.20 up +0.008 down -0.008	
Insulation (2)	FR-PVC	Diameter: 1.10 +0.13mm *6
Jacket (5)	External O.D.	4.90mm(+/-0.20mm)
	Surface	Clean / Smooth
	Outer Material	LSF (complies RoHS)
	Colour	Grey
Shield (3)	Material: AL-foil	Colour: Blue
Drain (4)	Material:	Stranded Tinned Copper
	Nom O.D. (mm):	0.20*7 up/down (+0.008)

Electrical Characteristics:

Conductor Resistance	20°C, Conductor DC Resistance	< 9.41 Ω/100M
Insulation DC Resistance	20°C, Insulation DC Resistance	>200Ω.M
Rated Voltage		300v
Rated Temperature (°C)		+80°C