


## UC<sup>CONNECT</sup> Cat6A (Solid) FTP Extender 180° Tool-less in Silver




### Cat6A Shielded Tool-Less 180° Extender

- Easy install facilitated by tool free wire termination
- Backward Compatible
- PoE + Konami IEEE 802.3at suitable for power over Ethernet +
- 10Gigabit Component level compliance to ISO/IEC 11801:2002 (including Amendment 2 – 2<sup>nd</sup> Edition), Amendment 2 to CENELEC EN 50173-1 (2010) and IEC 60603-7-51, ANSI TIA 568-C.2
- 22-24awg Compatible

## Specification

Item	Description
Material Housing	Zinc Die Casting PA
Insulation Material	PC White
Contact Area	30 μ Gold Plated
Wire size compatibility	5-10 mm
Connection class	IP20
Dimensions	65.6mm x 13.5 mm x 15.6 mm
<b>Performance</b>	
Contact resistance	≤20m
Insulation resistance	≥500m
Operating temperature	-40 ° C - + 70 ° C

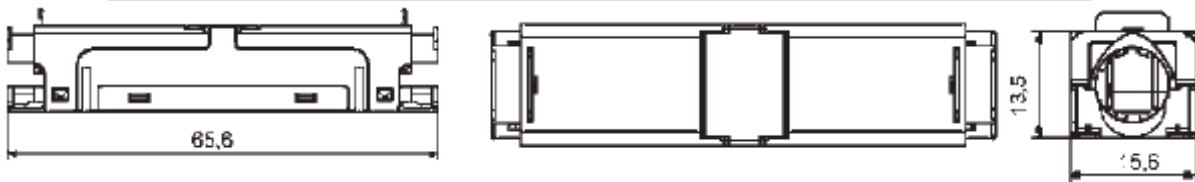

## Technical data

Material Code	Material Description	Description Code	Weight	Items per Packaging Unit
YEXBP01759	Cat6A (Solid) FTP Extender 180° Tool-less in Silver	UC C500 EX TF S	35g	1 or 24

© PRYSMIAN GROUP 2014, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.