


DRS Active - specification

Included as standard:

- Centre post frame configuration
- Two pairs of 19" mounting rails
- Unit height labels fitted to front and rear 19" mounting rails (numbered bottom to top)
- Nylon skids
- Doors configured LH hinged as standard
- Doors fitted with standard key locking swing handle with 2-point locking
- Hi-Flo curved vented front door, flat vented rear door
- Quick release side panels both sides
- Top panel configuration: enhanced brush entry panel rear all other panels are plain
- Air management baffle kits
- Earth bonding kit
- Available in standard light grey or black

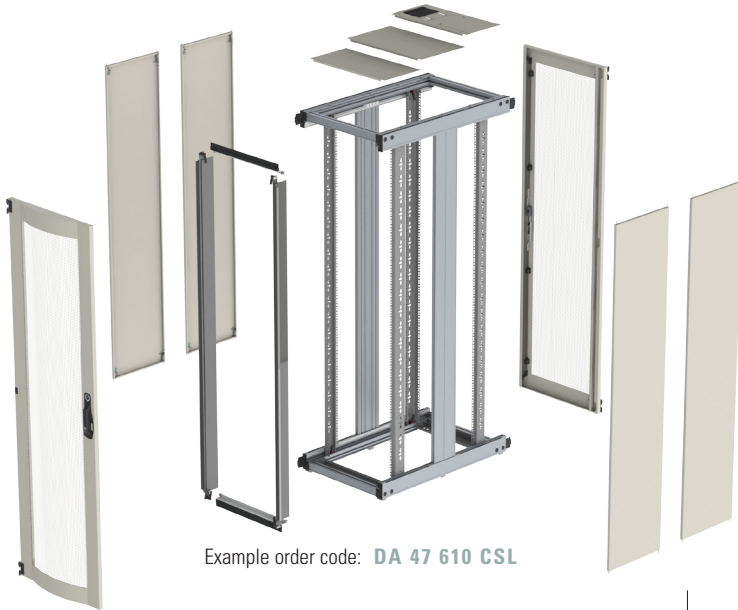

Example order code: **DA 47 610 CSL**

Configuration	Application	Width mm			Configuration see page 42				
		Depth mm	1000	1200	1400	Build	Sides	Colour	Base
Active Rack	DA	42U	610	612	614	C	S	L	
		47U	610	612	614	C	S	L	
		52U	610	612	614	C	S	L	

See pages 6-7 for platform application compatibility