


## Switch - specification

### Included as standard:

- Offset rear frame configuration
- Two pairs of 19" mounting rails
- Unit height labels fitted to front and rear 19" mounting rails (numbered bottom to top)
- Nylon skids
- Single doors configured LH hinged as standard
- Doors fitted with standard key locking swing handle with 2-point locking
- Hi-Flo curved vented front door, flat double vented rear door
- Quick release side panels both sides
- Top panel configuration: enhanced brush strip rear all other panels plain
- Air management baffle kit
- Earth bonding kit
- Available in standard light grey or black

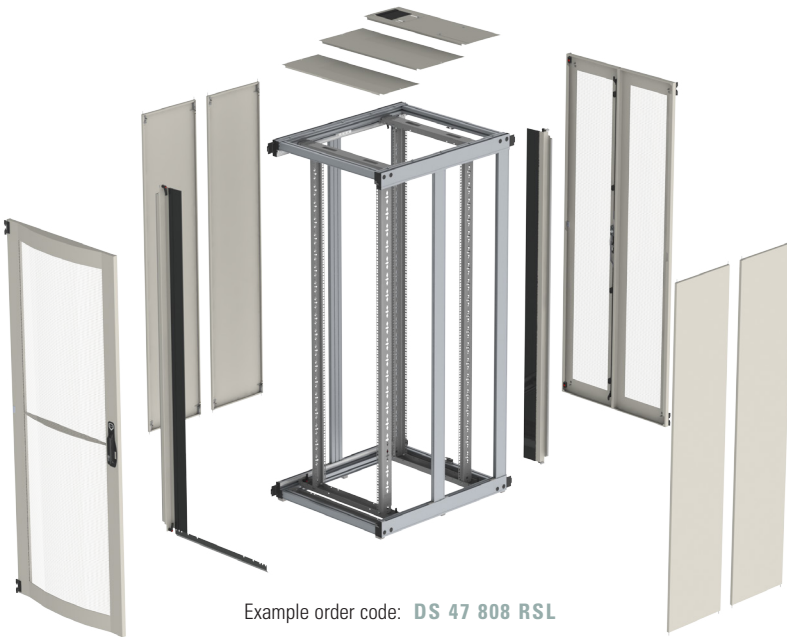

Example order code: **DS 47 808 RSL**

Configuration	Application	Width mm	800				Configuration see page 42			
		Depth mm	875	1000	1200	1400	Build	Sides	Colour	Base
Switch Rack	DS	42U	808	810	812	814	R	S	L	
		47U	808	810	812	814	R	S	L	
		52U	808	810	812	814	R	S	L	

See pages 6-7 for platform application compatibility