


LISA Fiber Cassette

Description

LISA fiber cassette, front 12 x LCD, rear 3 x MTP8 non-pinned, OM4, PC
 LC-L-MH-88-12-24-54-F8-NSO-LL

Features

- Cassette accessed from the front with side-facing adaptors with pull-out and hinge down function for maintenance
- Patch cords supported and guided into management system
- Various connector types supported - up to 36 x SFF
- Incoming cabling pre-terminated with MTP 8, 12 or 24 fiber interface, with MTP Elite connectivity
- Quick installation and easy handling without tools
- Easy to understand labeling and highly visible colour coding of cassette

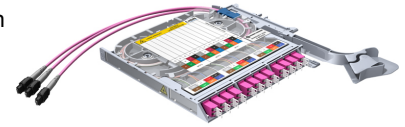

Technical data

Mechanical data

Characteristics	Values
Product family	LISA
Suitable for	Transition
Dimension (Width x Length x Height) (mm)	262.5 x 293 x 18.5
Dimension (Width x Length x Height) (inch)	10.3 x 11.5 x 0.7
Weight (g)	520
Weight (oz)	18.3
Material module	ABS/PC
Colour module	window grey (RAL 7040)
Number of Adaptor front (pcs)	12
Adaptor type front	LC
Adaptor type front polishing	UPC
Adaptor colour front	grey
Number of Adaptor rear (pcs)	3
Adaptor type rear	MTP8
Adaptor type rear polishing	UPC
Adaptor colour rear	grey
Adaptor gender rear	non-pinned
Polarity	NS

Optical data


Characteristics	Values
Fiber count	24
Fiber type	Multimode 50/125 µm OM4
Module insertion loss	Multimode OM4: <=0.35 dB
Module return loss	Multimode OM4: >=30dB

Environmental data

Characteristics	Values
Temperature resistance (min to max) (°C)	-40 to 70
Temperature resistance (min to max) (°F)	-40 to 158
UL Rating	UL 94 V-0
Free of halogen	Yes
RoHS compliant	Yes
REACH compliant	Yes

LISA Fiber Cassette

Technical drawing

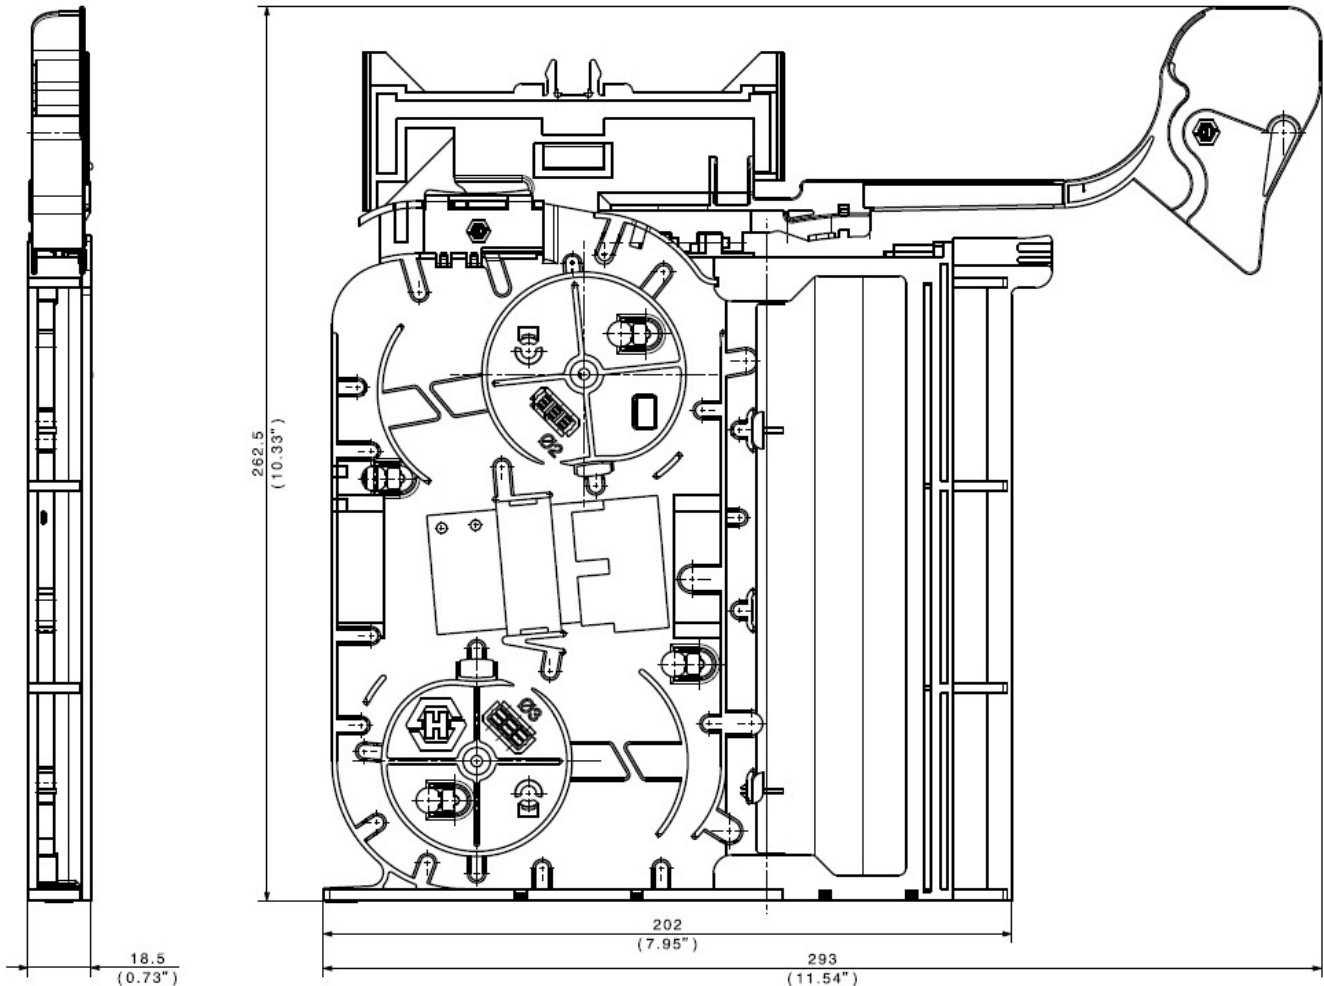

Ordering information

Description	Item number
LISA fiber cassette, front 12 x LCD, rear 3 x MTP8 non-pinned, OM4, PC	85088659

Related Documents

Installation manual	DOC-0000783226
---------------------	----------------