


LISA Fiber Cassette

Description

LISA fiber cassette, front 12 x LCD, rear 1 x MTP24 non-pinned, OM4, PC
 LC-L-MH-88-12-24-54-F2-R1O-LL

Features

- Cassette accessed from the front with side-facing adaptors with pull-out and hinge down function for maintenance
- Patch cords supported and guided into management system
- Various connector types supported - up to 36 x SFF
- Incoming cabling pre-terminated with MTP 8, 12 or 24 fiber interface, with MTP Elite connectivity
- Quick installation and easy handling without tools
- Easy to understand labeling and highly visible colour coding of cassette

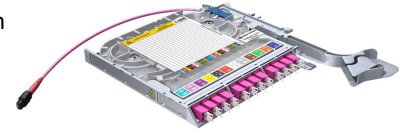

Technical data

Mechanical data

Characteristics	Values
Product family	LISA
Suitable for	Transition
Dimension (Width x Length x Height) (mm)	262.5 x 293 x 18.5
Dimension (Width x Length x Height) (inch)	10.3 x 11.5 x 0.7
Weight (g)	500
Weight (oz)	17.6
Material module	ABS/PC
Colour module	window grey (RAL 7040)
Number of Adaptor front (pcs)	12
Adaptor type front	LC
Adaptor type front polishing	PC
Adaptor colour front	heather violet
Number of Adaptor rear (pcs)	1
Adaptor type rear	MTP24
Adaptor type rear polishing	PC
Adaptor colour rear	red
Adaptor gender rear	non-pinned
Polarity	R1

Optical data


Characteristics	Values
Fiber count	24
Fiber type	Multimode 50/125 µm OM4
Module insertion loss	Multimode OM4: ≤0.35 dB
Module return loss	Multimode OM4: ≥30dB

Environmental data

Characteristics	Values
Temperature resistance (min to max) (°C)	-40 to 70
Temperature resistance (min to max) (°F)	-40 to 158
UL Rating	UL 94 V-0
Free of halogen	Yes
RoHS compliant	Yes
REACH compliant	Yes

LISA Fiber Cassette

Technical drawing

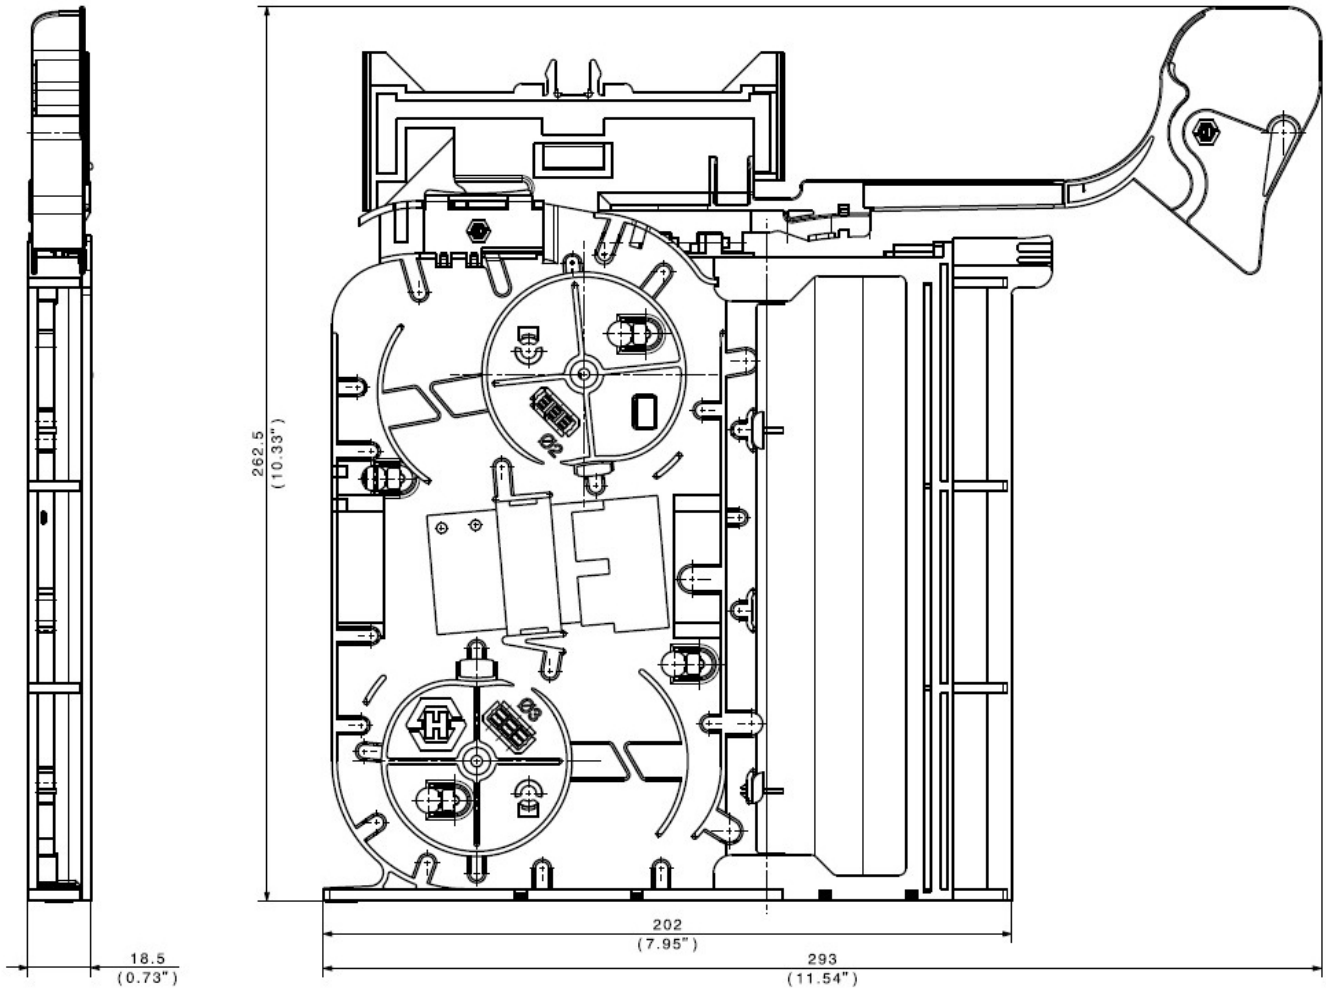

Ordering information

Description	Item number
LISA fiber cassette, front 12 x LCD, rear 1 x MTP24 non-pinned, OM4, PC	85088671

Related Documents

Installation manual	DOC-0000783226
---------------------	----------------