


UC^{CONNECT} Draka OM3 Pigtails

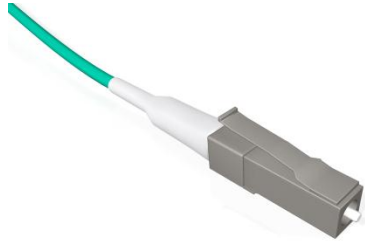

OM3 Pigtails compatible with UC^{Connect} system

- Available with LC, SC & ST connectors
- Usable in very compact areas
- Applications: FTTx, telecommunications, data communications, CATV, test and measurement
- Ultra polish (UPC) as standard and Angle polish (APC) by request
- Un-tuned patchcords as standard and tuned patchcords by request
- Qualified to Telcordia GR326 and IEC 61300 standards and RoHS compliant materials
- Supplied with full traceability and test certification at each assembly
- Robust and flexible
- Supplied with ceramic ferrules
- Operating temperature: min. - 40 °C; max. 85 °C
- Available length is 1m
- Standard cable diameter is 900µm with easy strip buffer. Ruggedized pigtails can also be supplied in 1.6mm, 2mm and 3mm.
- The fibres and the buffer are coloured to ensure ease of identification when stripped

Specification

Fibre specifications	MM 50/125 OM3
Cable diameter	900 µm (standard) and 1.6mm, 2mm, 3mm by request (for ruggedized pigtails)
Colour	Turquoise
Operating temperature	Minimum (nom) - 40 °C Maximum (nom) + 85 °C
Maximum Insertion Loss	≤ 0.4 (UPC)
Return Loss	Not measured

UC^{CONNECT} Draka OM3 Pigtails

Technical data

Material Code	Material Text	Material Description
YPTBP01560	LC OM3 50/125 Pigtail 1m	UC COM3 PT LC R YL 00100
YPTBP01561	SC OM3 50/125 Pigtail 1m	UC COM3 PT SC R YL 00100
YPTBP01562	ST OM3 50/125 Pigtail 1m	UC COM3 PT ST R YL 00100
Related Products		
Material Code	Material Text	Material Description
YPPBP00212	1U 24 Port LC Duplex Multimode Patch Panel Black	UC COMF PP LD SO BK 24 1U
YPPBP00213	1U 12 Port LC Duplex Multimode Patch Panel Black	UC COMF PP LD SO BK 12 1U
YPPBP00214	1U 24 Port SC Duplex Multimode Panel Black	UC COMF PP SD SO BK 24 1U
YPPBP00215	1U 12 Port SC Duplex Multimode Panel Black	UC COMF PP SD SO BK 12 1U
YPPBP00216	1U 24 Port ST Simplex Multimode Panel Black	UC COMF PP ST SO BK 24 1U
YPPBP00217	1U 12 Port ST Simplex Multimode Panel Black	UC COMF PP ST SO BK 12 1U

© PRYSMIAN GROUP 2013, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.